


# SPLICE

## Galvanized for strand

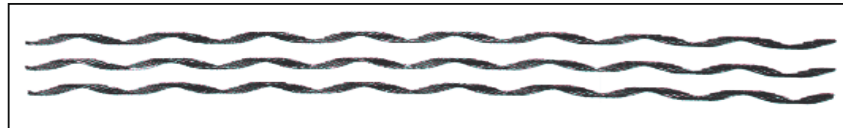

The steel splices is a product especially conceived to repair or connect a guy end. Used adequately, the splice reaches its maximum fracture capacity when the cable is made according to standard ASTM-A475 and/or CSA-G12 specifications. Once installed, the splice may not be re-used. This product is produced in class **A** steel, grade 180 (CSA-G12 / ASTM-A475) standard or class **B** and **GALFAN** upon request.

**Here is a guide to understanding the catalog number.** It is divided into 3 parts, ex: **3/16-27-SJ**, **3/16** is the diameter of the strand, **27** is the length in inches and **SJ** is for "Steel Splices", and **A, B or G (GALFAN)**.

STRAND			CATALOG		DESCRIPTION		
Diameter± nominal/inch			PAYER code	Reference	Packaging	Length ± Inch	Color
3/16	7w	0.195	3/16-27-SJA	GLS-2102	40	27	Red
7/32	7w	0.216	7/32-29-SJA	GLS-2103	40	29	Green
1/4	3 or 7w	0.25	1/4-35-SJA	GLS-2104	40	35	Yellow
9/32	7w	0.285	9/32-38-SJA	GLS-2105	25	38	Blue
5/16	3 or 7w	0.327	5/16-42-SJA	GLS-2106	20	42	Black
3/8	3 or 7w	0.358	3/8-50-SJA	GLS-2107	15	50	Orange
7/16	7w	0.432	7/16-56-SJA	GLS-2108	10	56	Green
1/2	7 or 19w	0.498	1/2-63-SJA	GLS-2109	8	63	Blue
9/16	7 or 19w	0.564	9/16-70-SJA	GLS-2110	5	70	Yellow